






## PCB Terminal Block Series 350

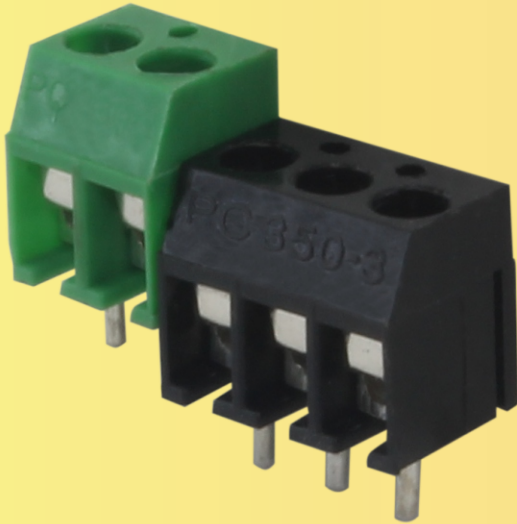

### DIMENSIONS





PBT 350-2



PBT 350-3

### PCB Layout

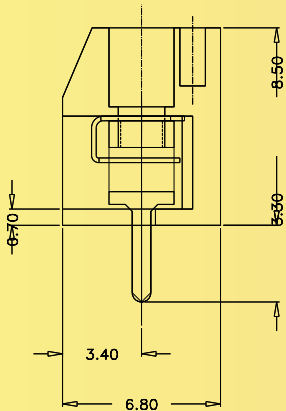

### TECHNICAL SPECIFICATION

Current Rating	7A
Voltage Rating	250V
Insulation Resistance	> 1000M ohms at 500V DC
Dielectric Strength	>2 KV
Moulded Material	Engineering Thermoplastic
Terminal	Solid Brass alloy - Tinned
Pitch	3.50mm
Screw	Brass Nickel Plated
Wire size	0.5-0.8 mm <sup>2</sup>
Wire Protector	Copper alloy
Screw Size	M2
Max. torque for terminal Screws	0.2 Nm

Note : (1) Flame Retardent Grade Insulator Confirming to UL 94 V-0 available on Request.  
(2) Recommended PCB hole 1.40 mm.

### Series Also Includes...



500



501



126



381



PBT W



762



527



ETK 50



PUT 2.5