



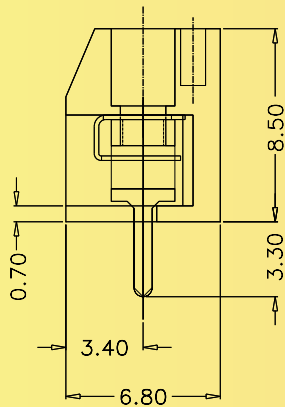


PCB Terminal Block Series 381

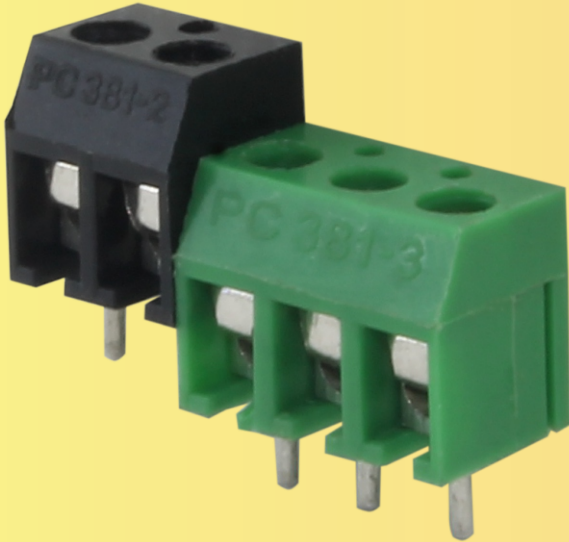


PCB Layout

DIMENSIONS

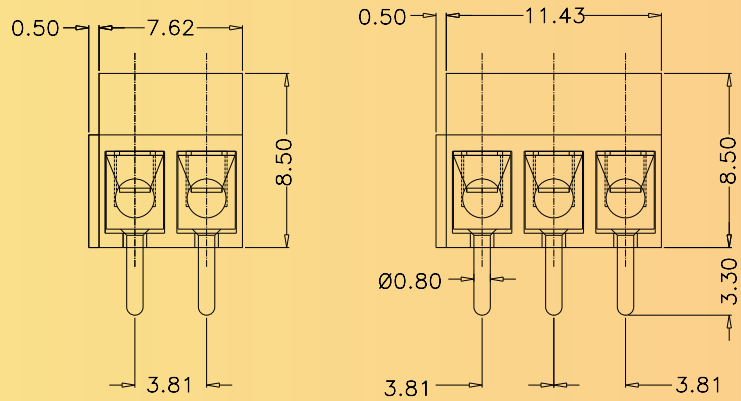

PBT 381-2

PBT 381-3

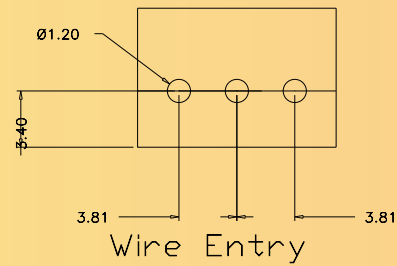

TECHNICAL SPECIFICATION

Current Rating	7A
Voltage Rating	250V
Insulation Resistance	> 1000M ohms at 500V DC
Dielectric Strength	>2 KV
Moulded Material	Engineering Thermoplastic
Terminal	Solid Brass alloy - Tinned
Pitch	3.81mm
Screw	Brass Nickel Plated
Wire size	0.5-0.8 mm ²
Wire Protector	Copper alloy
Screw Size	M2
Max. torque for terminal Screws	0.2 Nm

Note : (1) Flame Retardent Grade Insulator Confirming to UL 94 V-0 available on Request.
(2) Recommended PCB hole 1.40 mm.

Series Also Includes...



500



501



126



350



PBT W



762



527



ETK 50



PUT 2.5