



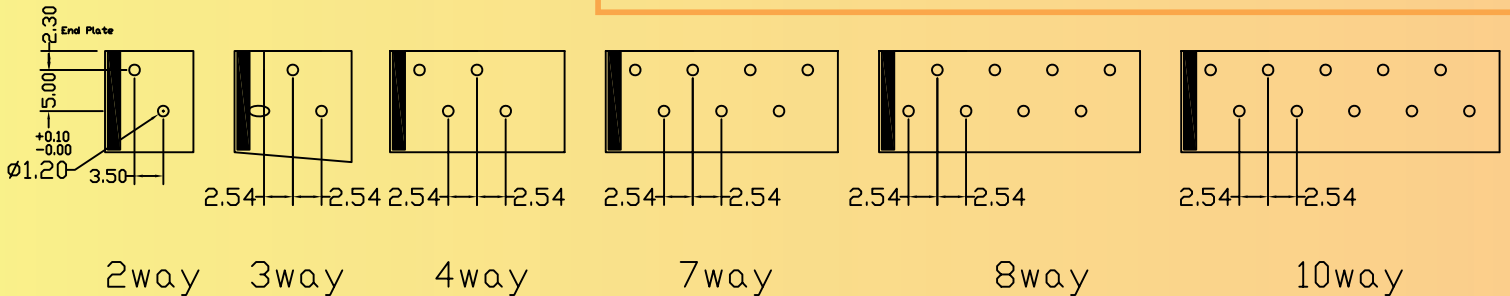

DIMENSIONS

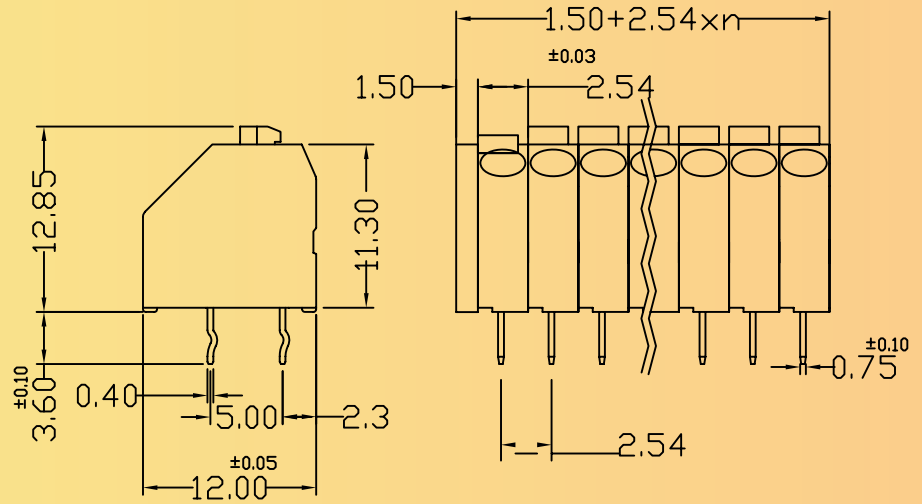

TECHNICAL SPECIFICATION

Current/Voltage Rating	2A / 160V AC
Test Class	IEC 60947 - 7 - 1
Recommended PCB Hole Dia.	1.20 mm
Dielectric Strength	>2.5 KV Min.
Moulded Material	Engineering Thermoplastic
Voltage Drop	20 m V
Pitch	2.54 mm
Screw	Screwless
Wire size	0.2 - 1.5 mm ²
Wire Protector	Copper alloy
Wire Strip Size	8.50 - 9.50 mm
Solder Pin Size	0.40 X 0.80 mm



PFT 235




PFT 250 3.5



HID



500



501



527



PRC 1



PUT 2.5



762