



## DIMENSIONS

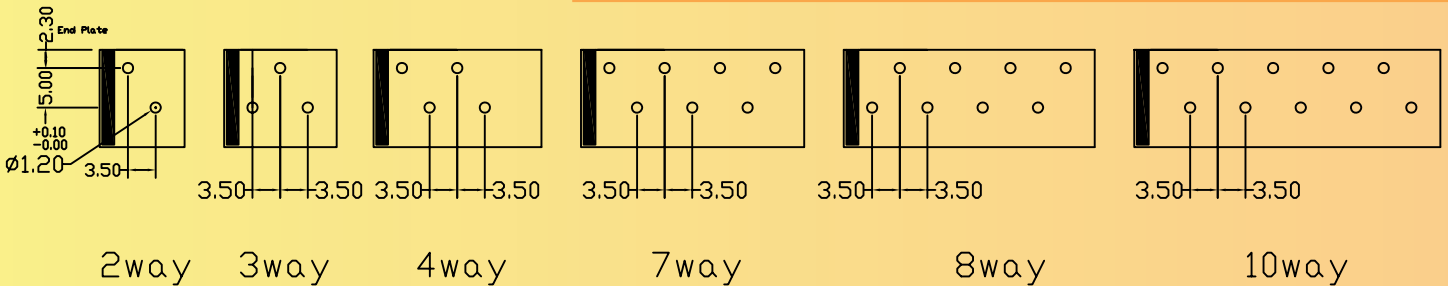


## TECHNICAL SPECIFICATION

Current/Voltage Rating	6A / 250V AC
Test Class	IEC 60947 - 7 - 1
Insulation Resistance	> 1000M ohms at 500V DC
Dielectric Strength	>3 KV Min.
Moulded Material	Engineering Thermoplastic
Voltage Drop	20 m V
Pitch	3.50 X 2.54 mm
Screw	Screwless
Wire size	0.2 - 1.5 mm <sup>2</sup>
Wire Protector	Copper alloy
Wire Strip Size	8.50 - 9.50 mm
Solder Pin Size	0.40 X 0.80 mm

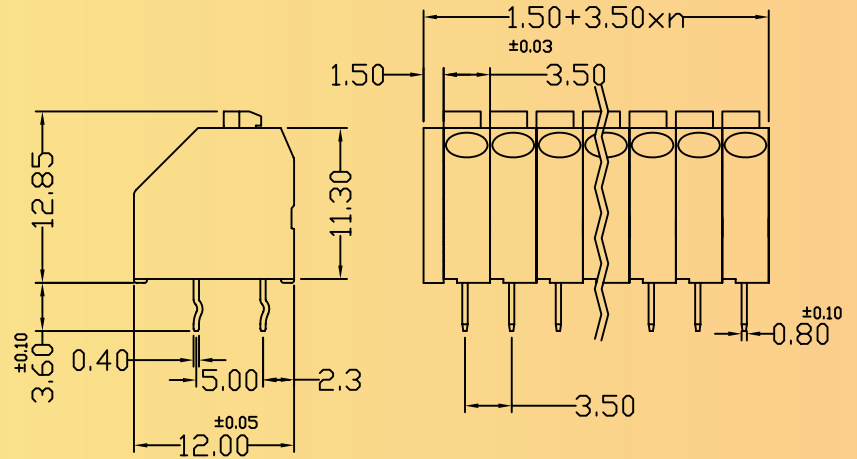

PFT 235




HID



PFT 250 2.5



500



501



527



PRC 1



PUT 2.5



762