





PRIME COMPONENTS

"Connections for life"

PCB Terminal Block Series 126(i)

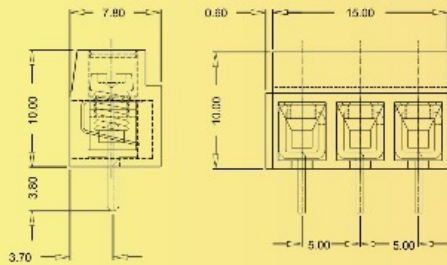

PBT 126 (I)-3

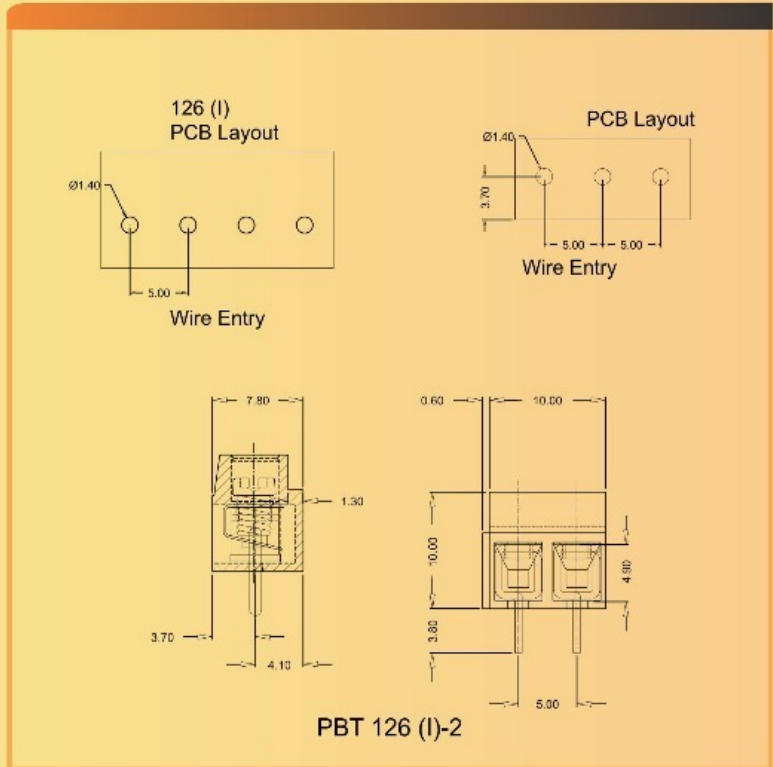

PBT 126 (I)-2

TECHNICAL SPECIFICATION

Note: All Dimension are in mm

| PARAMETERS | SERIES | 126 (I) |
|---------------------------------|--------|---------------------------|
| Current Rating | | 5A |
| Voltage Rating | | 250V |
| Insulation Resistance | | > 1000M ohms at 500V DC |
| Dielectric Strength | | >2 KV |
| Moulded Material | | Engineering Thermoplastic |
| Terminal | | MS/Brass(Tin Plated) |
| Pitch | | 5.00mm |
| Screw | | MS(Zinc Plated) |
| Wire size | | 0.50 -2.5 Sq.mm (Max.) |
| Wire Protector | | Copper alloy |
| Wire Strip Length | | 8-9mm |
| Screw Size | | M2.5 |
| Max. torque for terminal Screws | | 0.3 Nm |

Note : (1) Recommended PCB hole 1.40mm.

Series Also Includes...



Off / Works : 830, GIDC Estate, Makarpura, Vadodara - 390010

www.primecomponents.net

+91-265-6642566/6670078, +91 9687676700

sales@primecomponents.net